


**FABRIC PANEL CORNER DETAIL**

TOP AND BOTTOM STAKES AND ROPES TO BE SET BELOW FINISHED GRADE. STAKES PLACED EVERY 3' OC, TOP AND BOTTOM STAKES OFFSET EVERY 18"

SOIL UPSLOPE OF SHORESUX/DREDGESUX TO BE FEATHERED FOR A SMOOTH TRANSITION TO THE EXISTING SLOPE/GRADE

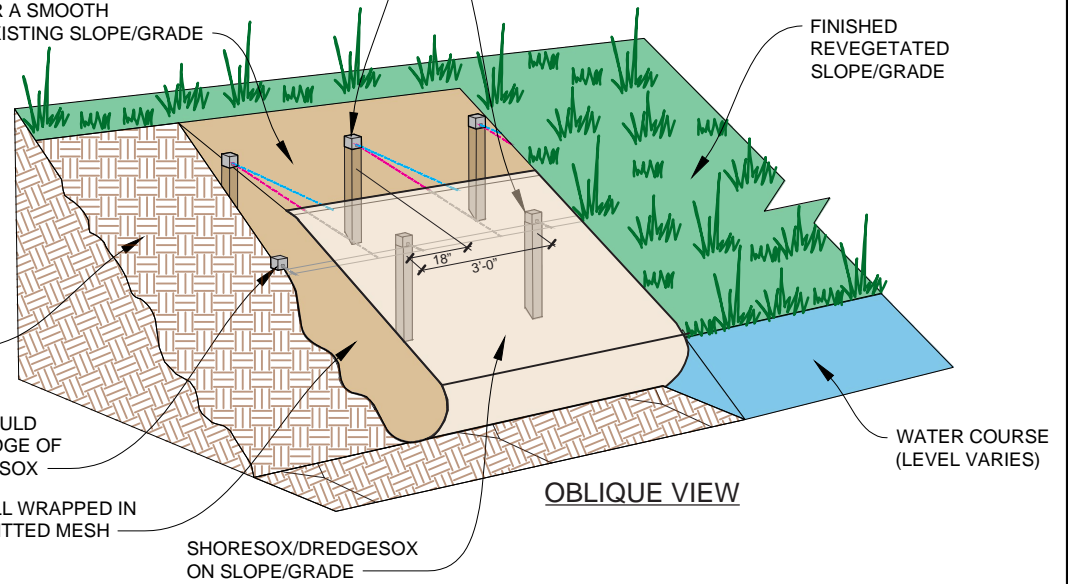

- DOUBLE-LAYERED KNITTED POLYETHYLENE MESH WITH THE FOLLOWING:
- 11 SPI COURSE COUNT
  - 7.34 OZ/SQ-YD WEIGHT (ASTM D3776)
  - 135 LBS WARP AND 207 LBS FILL BREAK STRENGTH (ASTM D5034)
  - 32.3% WARP AND 61.7% FILL BREAK ELONGATION (ASTM D5034)
  - 58.0 LBS WARP AND 70.3 LBS FILL TEAR STRENGTH (ASTM D5587)
  - 284 PSI BURSTING STRENGTH (ASTM D3786)
  - AVAILABLE IN SADDLE TAN OR NATURAL GREEN
  - AVAILABLE IN FIRE RETARDANT VERSION

**SHORESUX/  
DREDGESUX DETAIL**



FOR CONSULTATION, CONTACT:  
950 PENINSULA CORPORATE  
CIRCLE, SUITE 2020  
BOCA RATON, FL 33487  
(561) 501-0057  
WWW.SOXEROSION.COM

PROJECT NO.: 0000.000.000  
SCALE: NO SCALE  
DRAWN BY: CH CHECKED BY: CC

DETAIL NO.  
**X**